COMPANY PROFILE
FOR

LCP TRADING SDN. BHD.
(COMPANY NO. 142386-K)

OFFICE/FACTORY :-

Lot 45B, Jln Kilang, Sedco Light Industrial Estate, Kolombong,
Off Mile 5 1/2, Jln Tuaran, Kota Kinabalu, Sabah.
Locked Bag 106, 88993 Kota Kinabalu, Sabah.
Tel : 088-432288,432299 Fax : 088-428196

Email : lcpshutter@gmail.com

LCP TRADING SDN BHD

(Company No: 142386-K)

SPECIALISED IN ROLLER SHUTTER, ROLLER GRILLE, FIRE RATED SHUTTER, PERFORATED ROLLER SHUTTER, POLYLITE TRANSPARENT ROLLER SHUTTER, SPEED ROLLER DOOR

LCP TRADING SDN BHD is a well established company and has been incorporated in Sabah since year 1985.
We are specialist in all types of roller shutter doors such as-

1) **Roller Shutter** (manually & electrically operate)

- Pre painted roller Shutter (light duty)
- Perforated roller shutter
- Aluminium roller shutter/grille
- Fire rated roller shutter
- Transparent (polycarbonate) roller shutter
- Heavy duty roller shutter
- Window Shutter

2) **Speed Roller Door** (Australia pattern)

(manually & electrically operate)

Stuti & Associates (Malaysia) Public Accountants

CERTIFIED TRUE COPY OF
THE ORIGINAL

PEJABAT PENDAFTAR SYARIKAT

MALAYSIA

BORANG 9

AKTA SYARIKAT, 1965

Seksyen 16 (4)

No. SHK Syarikat

No. Tempatan 142386

PERAKUAN PERBADANAN SYARIKAT SENDIRIAN

Ini adalah memperakui bahawa

LCP TRADING SDN. BHD.

adalah diperbadankan di bawah Akta Syarikat, 1965 pada dan mulai dari 18 haribulan Julai 19 85, dan bahawa syarikat ini ialah sebuah Syarikat Berhad Menurut Syer dan bahawa syarikat ini adalah sebuah syarikat sendirian.

Dibuat di bawah tandatangan dan meteri saya di Kuala Lumpur.

pada 18 haribulan Julai 19 85.

(PUTEH BT MAHMOOD)

PERAKUAN PENDAFTARAN

Adalah dengan ini diperakui bahawa kontraktor yang dinyatakan di bawah ini telah berdaftar dengan Lembaga mengikut Bahagian VI Akta Lembaga Pembangunan Industri Pembinaan Malaysia 1994. Pendaftaran ini adalah tertakluk kepada syarat-syarat yang telah ditetapkan bersama perakuan ini.

No. Pendaftaran	:	1970917-SB043194
Nama Kontraktor	:	LCP TRADING SDN BHD
Alamat Berdaftar	:	LOT 45B, JALAN KILANG, SEDCO LIGHT INDUSTRIAL ESTATE, KOLOMBONG, OFF MILE 5 1/2,JALAN TUARAN, 88450 KOTA KINABALU
Daerah	:	KOTA KINABALU
Tarikh Mula Berdaftar	:	15/09/1997

GRED	KATEGORI	PENGKHUSUSAN
G3	B	B04,B18,B12,B28
G3	CE	CE21

Tarikh Mula Berkuatkuasa : **09/10/2017**

Tarikh Habis Tempoh Perakuan : **24/12/2020**

STATUS: AKTIF

Ketua Eksekutif

Lembaga Pembangunan Industri Pembinaan Malaysia

Tarikh: 09/10/2017

LCP TRADING SDN BHD
(Co. No 142388K) SINCE 1985


ROOFLITE SYSTEM SDN BHD
(Co. No 170330H) SINCE 1988

WE ALSO SPECIALIZE IN

- Fire Shutter
- Retractable Awning
- Windows Shutter
- Aluminium Roller Grille
- Heavy Duty Shutter
- Aluminium Roller shutter
- TRIBALL Spaceframe System



TENSION MEMBRANE

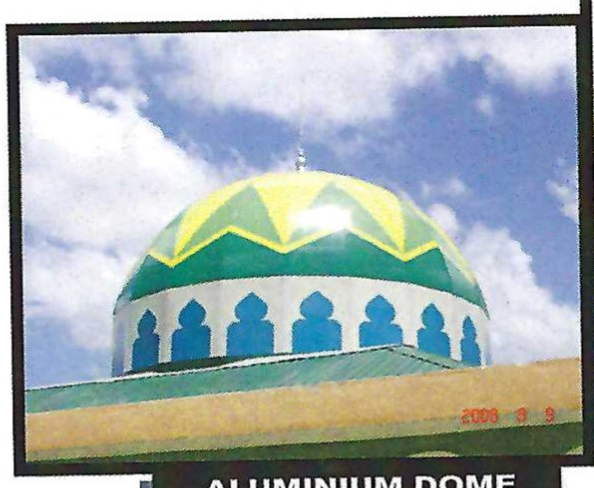

ALUMINIUM DOME



FABRIC AWNING




ALUM. COMPOSITE PANEL WALL CLADDING




LAMINATED GLASS SKYLIGHT




POLYCARBONATE SKYLIGHT

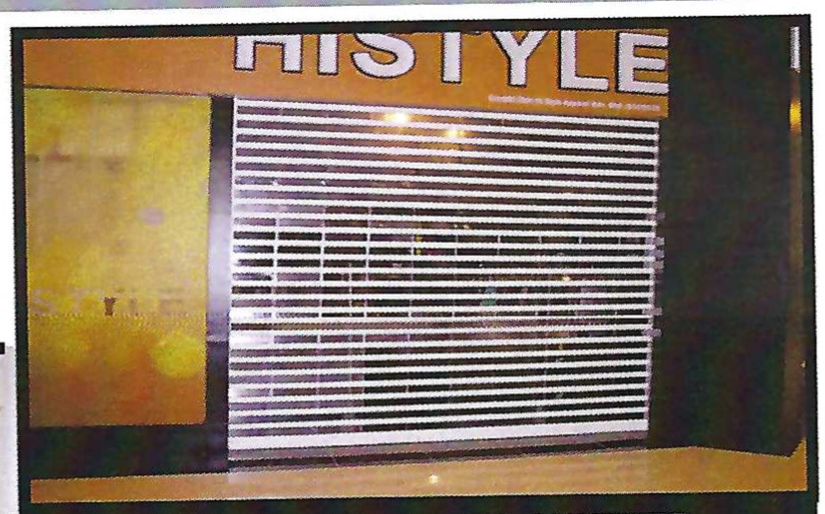

TRANSPARENT ROLLER SHUTTER

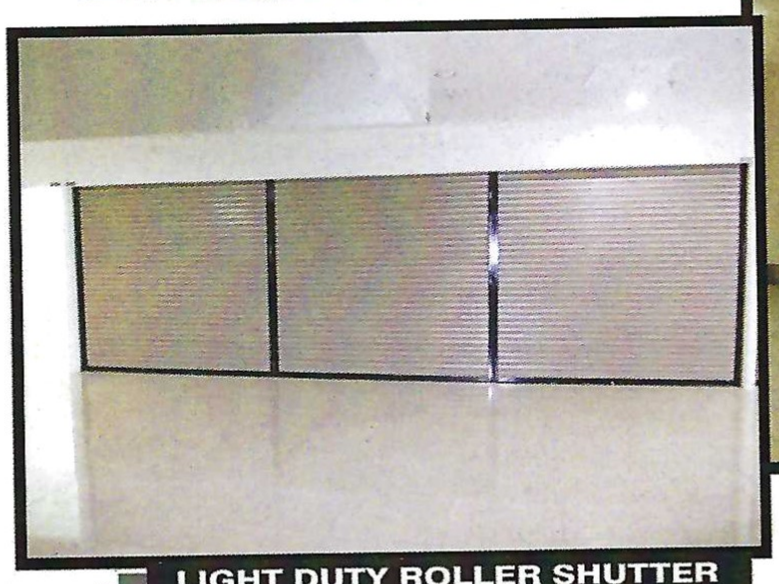

LIGHT DUTY ROLLER SHUTTER

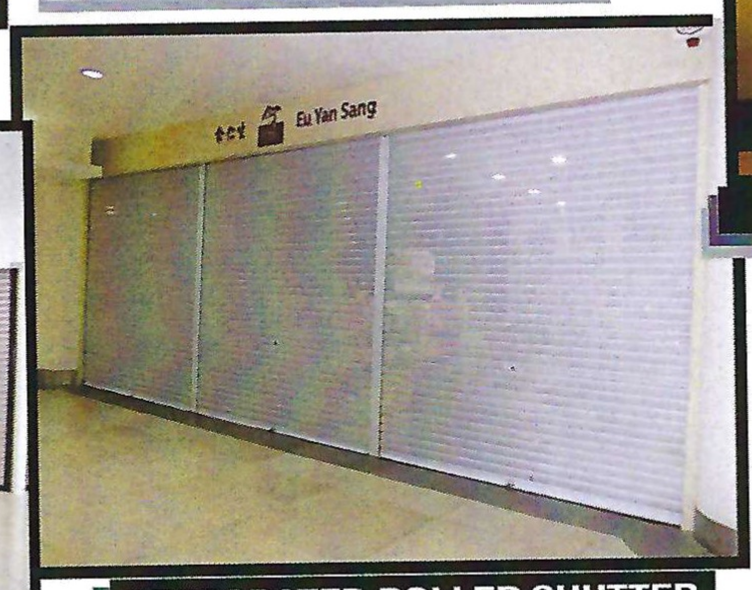

PERFORATED ROLLER SHUTTER



SPEED ROLLER DOOR

Office / Factory
Lot 45B, Jln Kilang, Sedco Light Industrial Estate, Kolombong, Off Mile 5 ½, Jln Tuaran,


TEL 088-432288 / 432299 FAX 088-428196
EMAIL lcpshutter@gmail.com / lcprssb@gmail.com

LCP TRADING SDN BHD


(Co. No 142388K) SINCE 1985

WE ALSO SPECIALIZE IN


- Fire Shutter
- G.I Prepainted Roller Shutter
- Aluminium Roller Grille
- Servicing

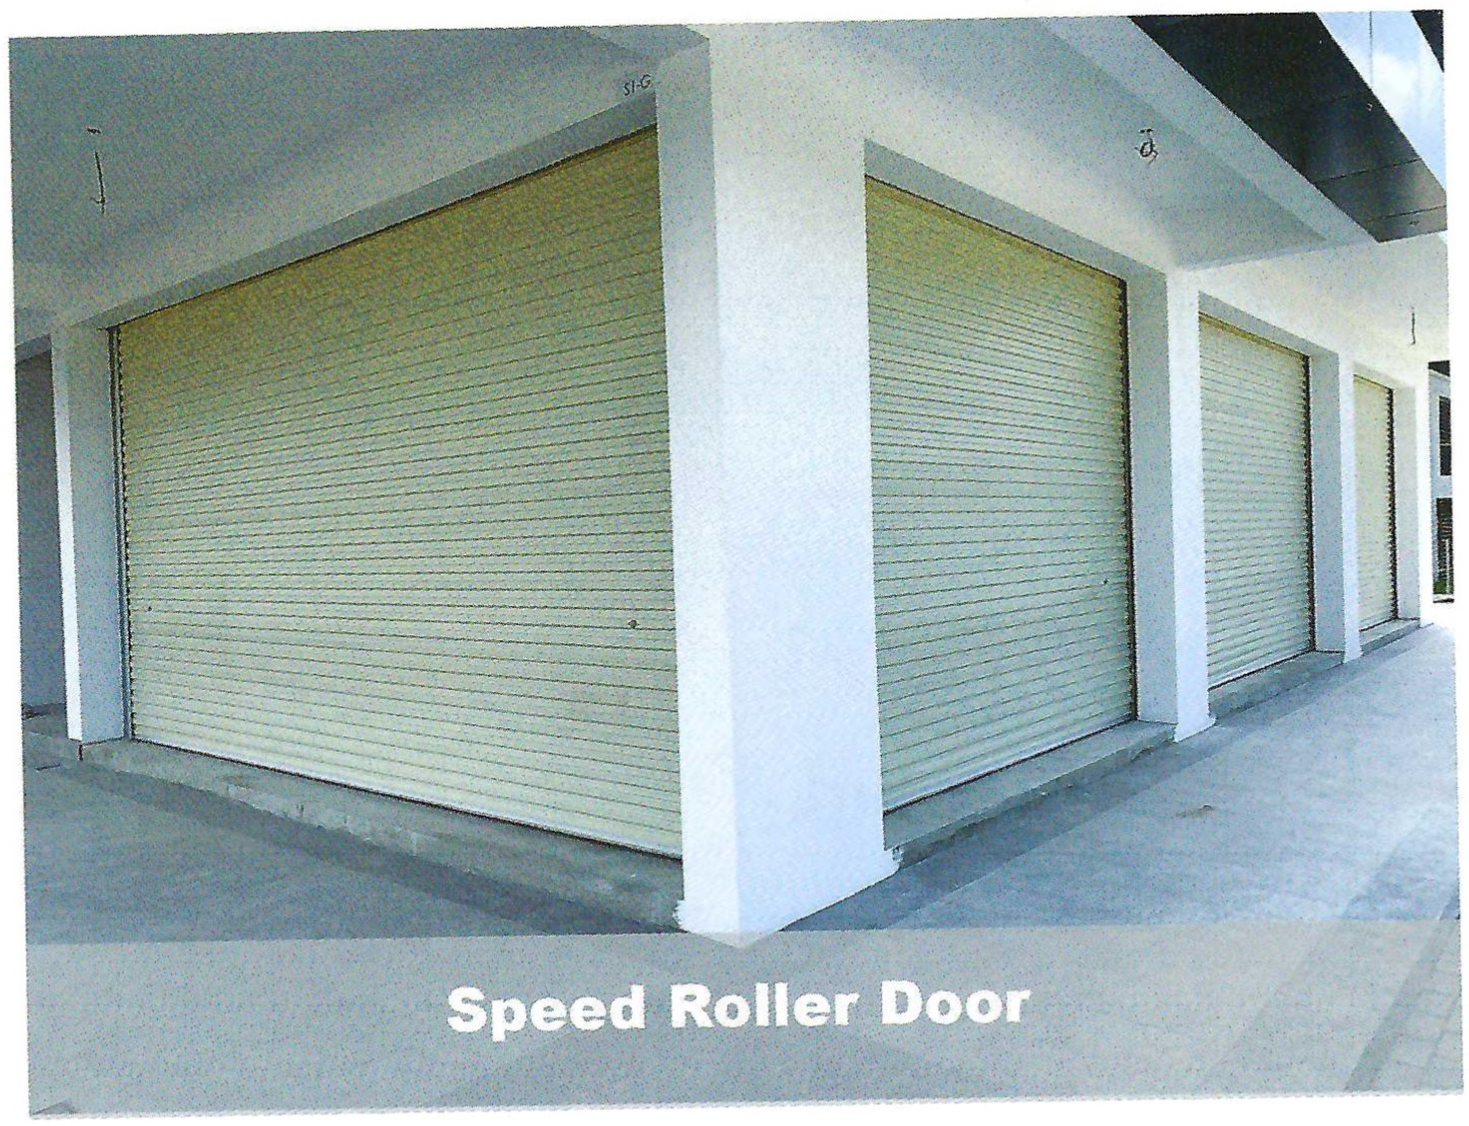

Speed Roller Door

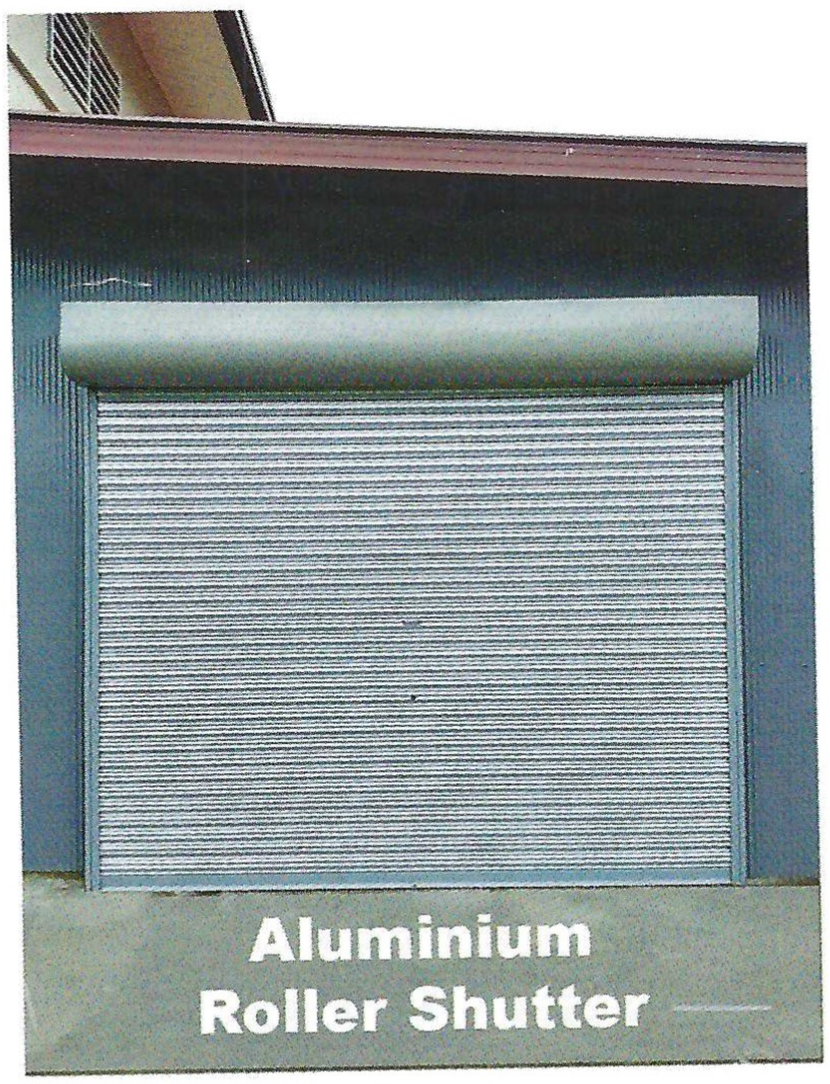

Aluminium Roller Shutter

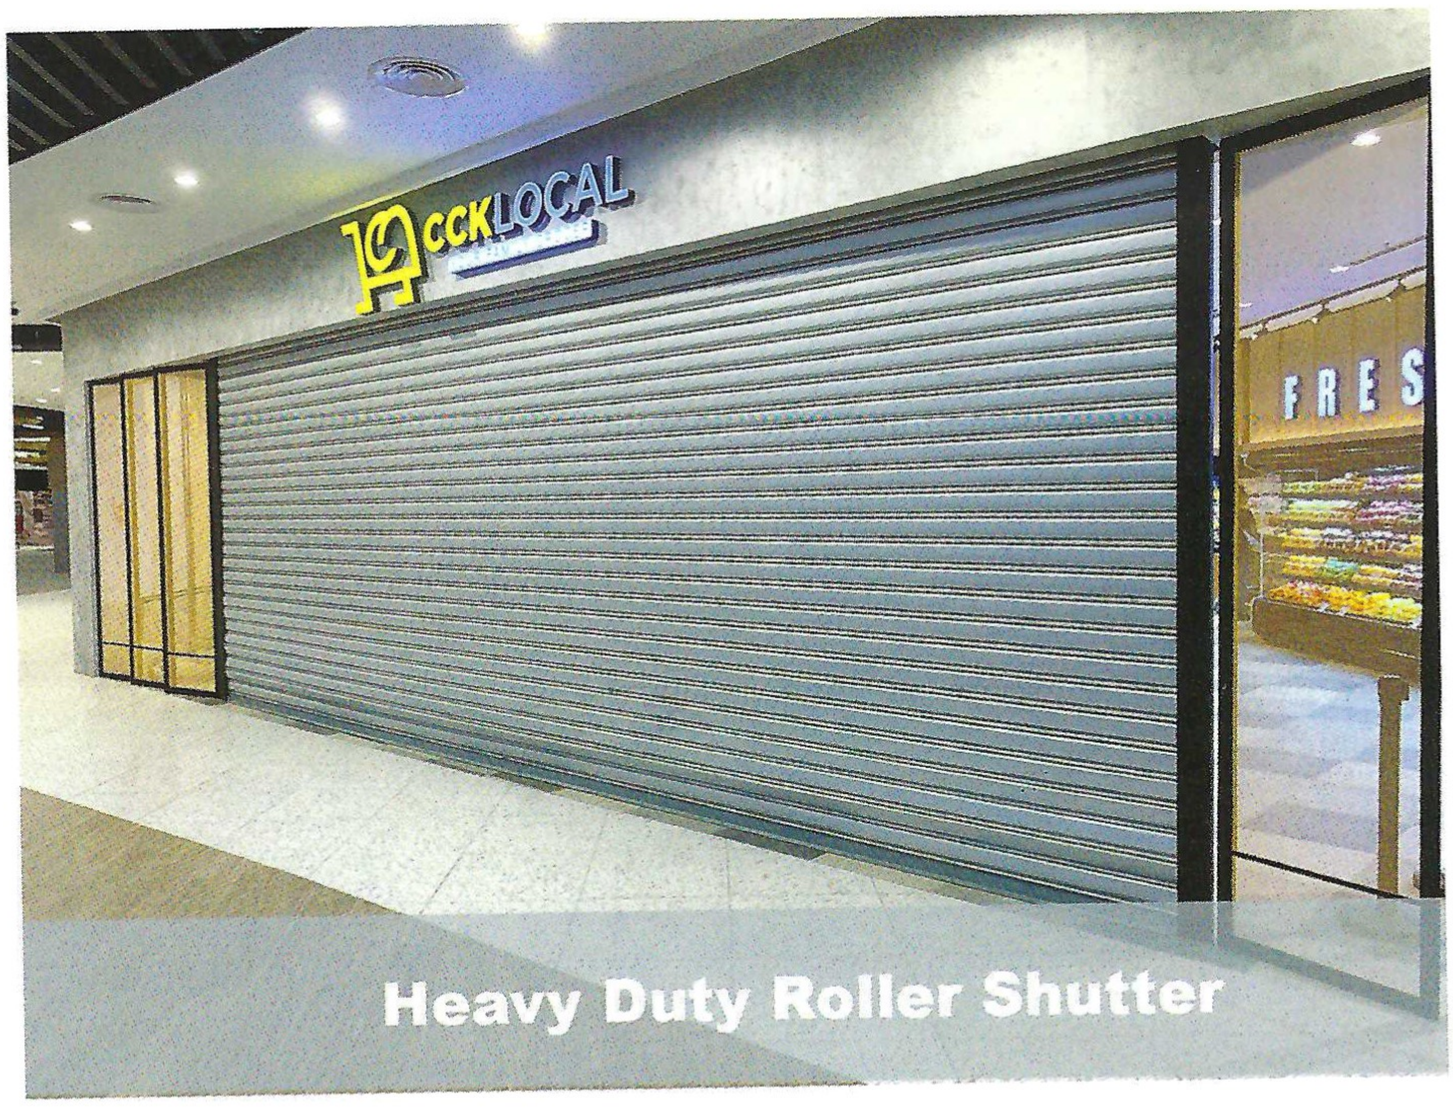

Heavy Duty Roller Shutter




LCP TRADING SDN BHD

(Co. No 142388K) SINCE 1985



Polylite Transparent Shutter

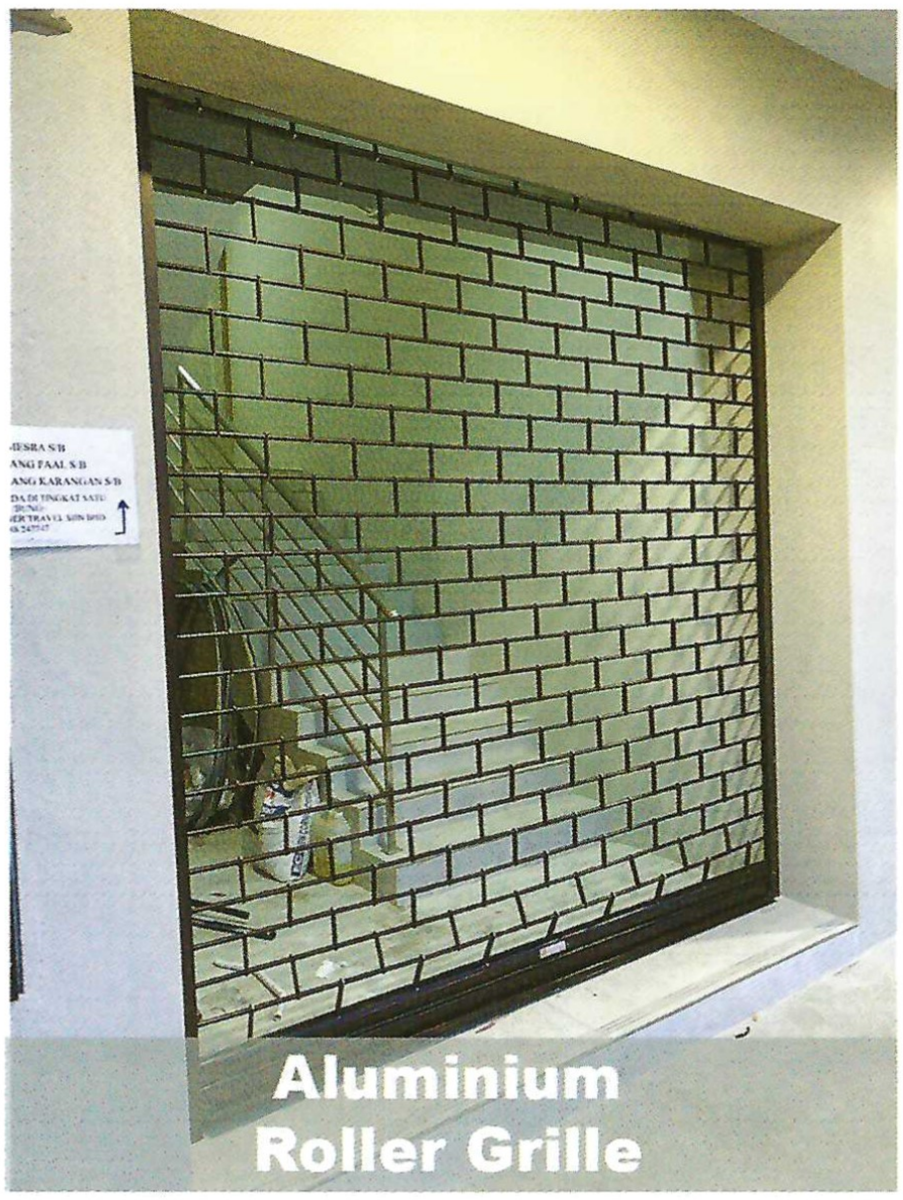

Aluminium Roller Grille



Fire Roller shutter

OFFICE / FACTORY

SPEED ROLLER DOOR

Australia



SPEEDY . SAFE . SILENT . STRONG . SMART . SERVICE

LCP

強偉鋁鐵捲門工業有限公司

LCP TRADING SDN. BHD.

Roller Door Feature

SPEEDY:
1.The speed operates at average of 250 mm per second or about twice the normal shutter speed.
2.Typical door height of 2500 mm height is able to complete its operation in 10 seconds.


SAFE:
1.During closing operation, the door will stop immediately and reverse when there is an obstruction.
2.During opening operation, the door will stop only when there is an obstruction.
3.Dual operation type (motorized or manual): During power failure the door can be operated by manual type for emergency evacuation.

SILENT:
1.Smooth and noiseless operation is achieved by using specially design Zineculum with anti-friction "Nylon Poly Guide".
2.The DC24V motor is designed to operate in ultra low noise with high efficiency.

STRONG:
1.The motor concerns for overheating are eliminated by fuse & circuit protection.
2.Counter balance spring is incorporated into the shaft assembly to reduce motor fatigue.
3.Larger pulley wheel is employed to reduce deflection in wider width application.


SMART:
The control panel incorporates fuzzy logic system with multi function features for roller door control.
A: Wireless rolling code remote control. B: Auto courtesy light with delay timer. C: Provision for interface with building control system,additional light,wall switch,security alarm and photo infrared detector.


SERVICE:
1.The Roller door can be completely factory pre-assembled for speedy site installation.
2.Control panel and motor is separated. There's no need to replace the control panel and the motor at the same time when either component has a breakdown.

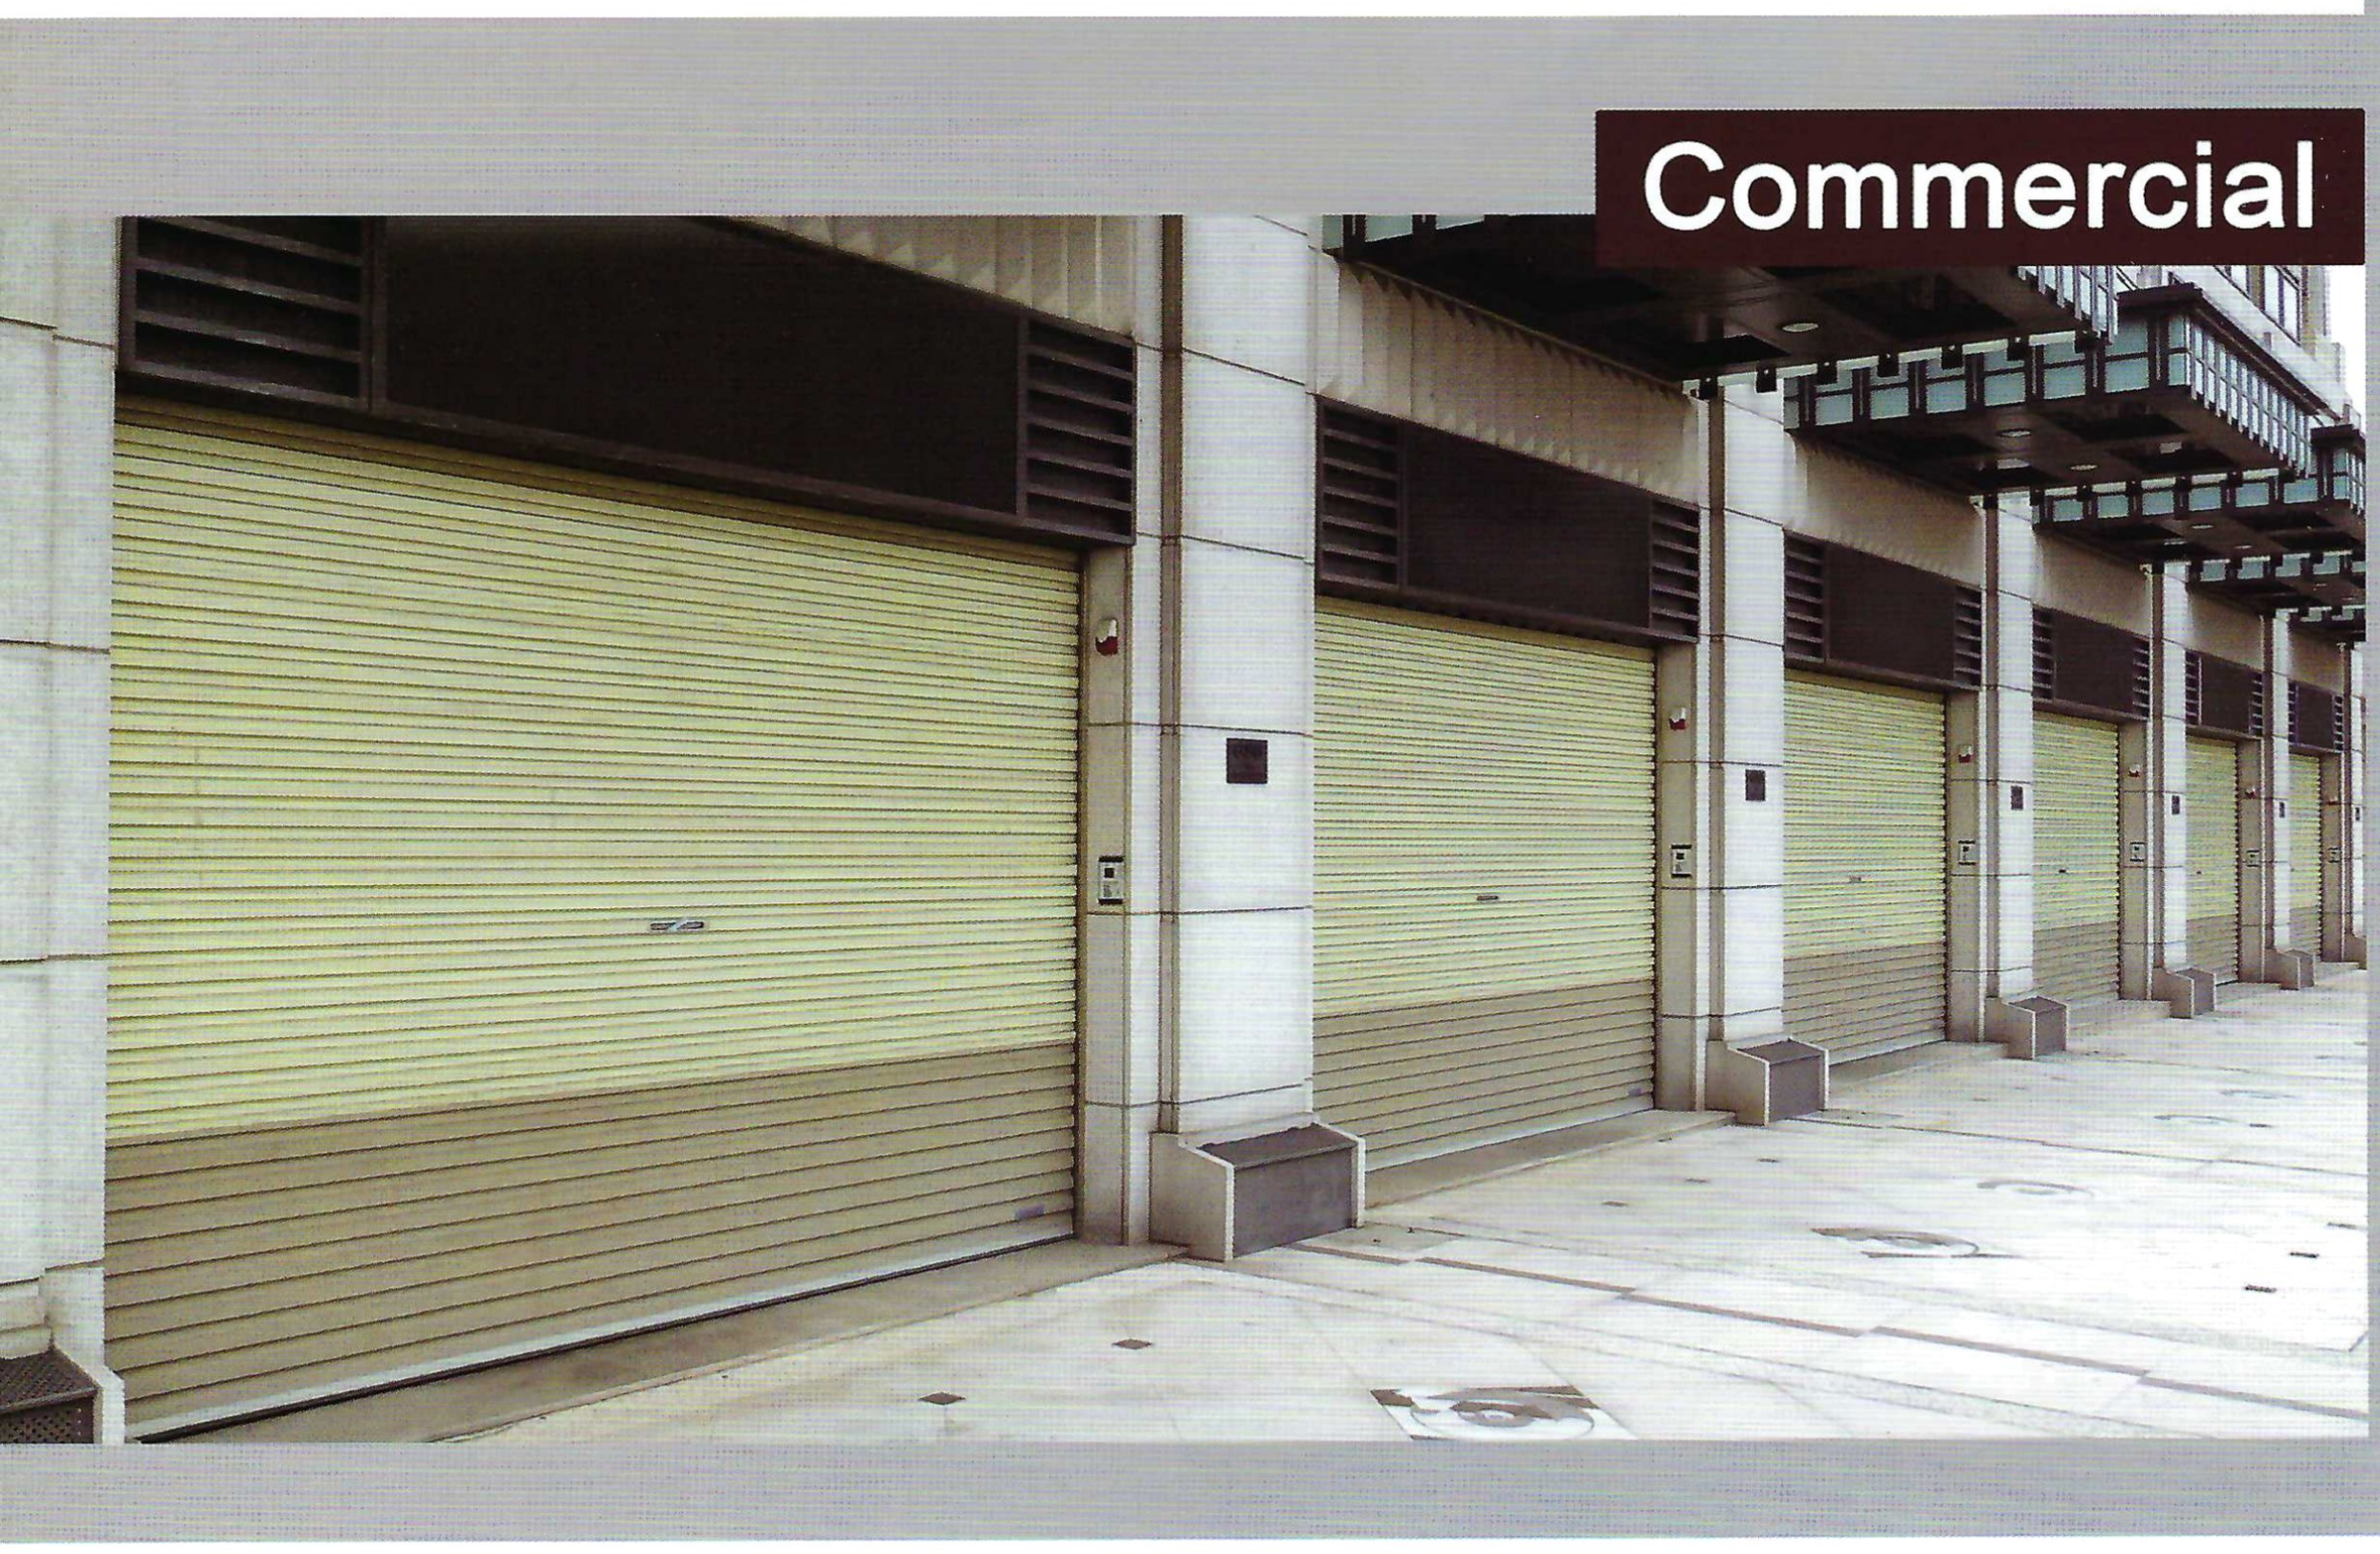


Typical Roller Door Assembly

1.Anchor Bracket	6.L-Bracket	11.Center Lock	16.Weather Seal	21.Side Guide
2.Center Pipe Bracket	7.Drive Unit	12.Mail Delivery Slot	17.Bottom Rail Wheel	22.Alum. Bottom Bar
3.U-bolt	8.Cable	13.Spring Clamp	18.Panel Slider	
4.Center Pipe	9.Control Panel	14.Wire Spring	19.Nylon Poly Glide	
5.Anchor Tube	10.Lock Shaft	15.Nylon Pulley Wheel	20.Manual Release Lever	

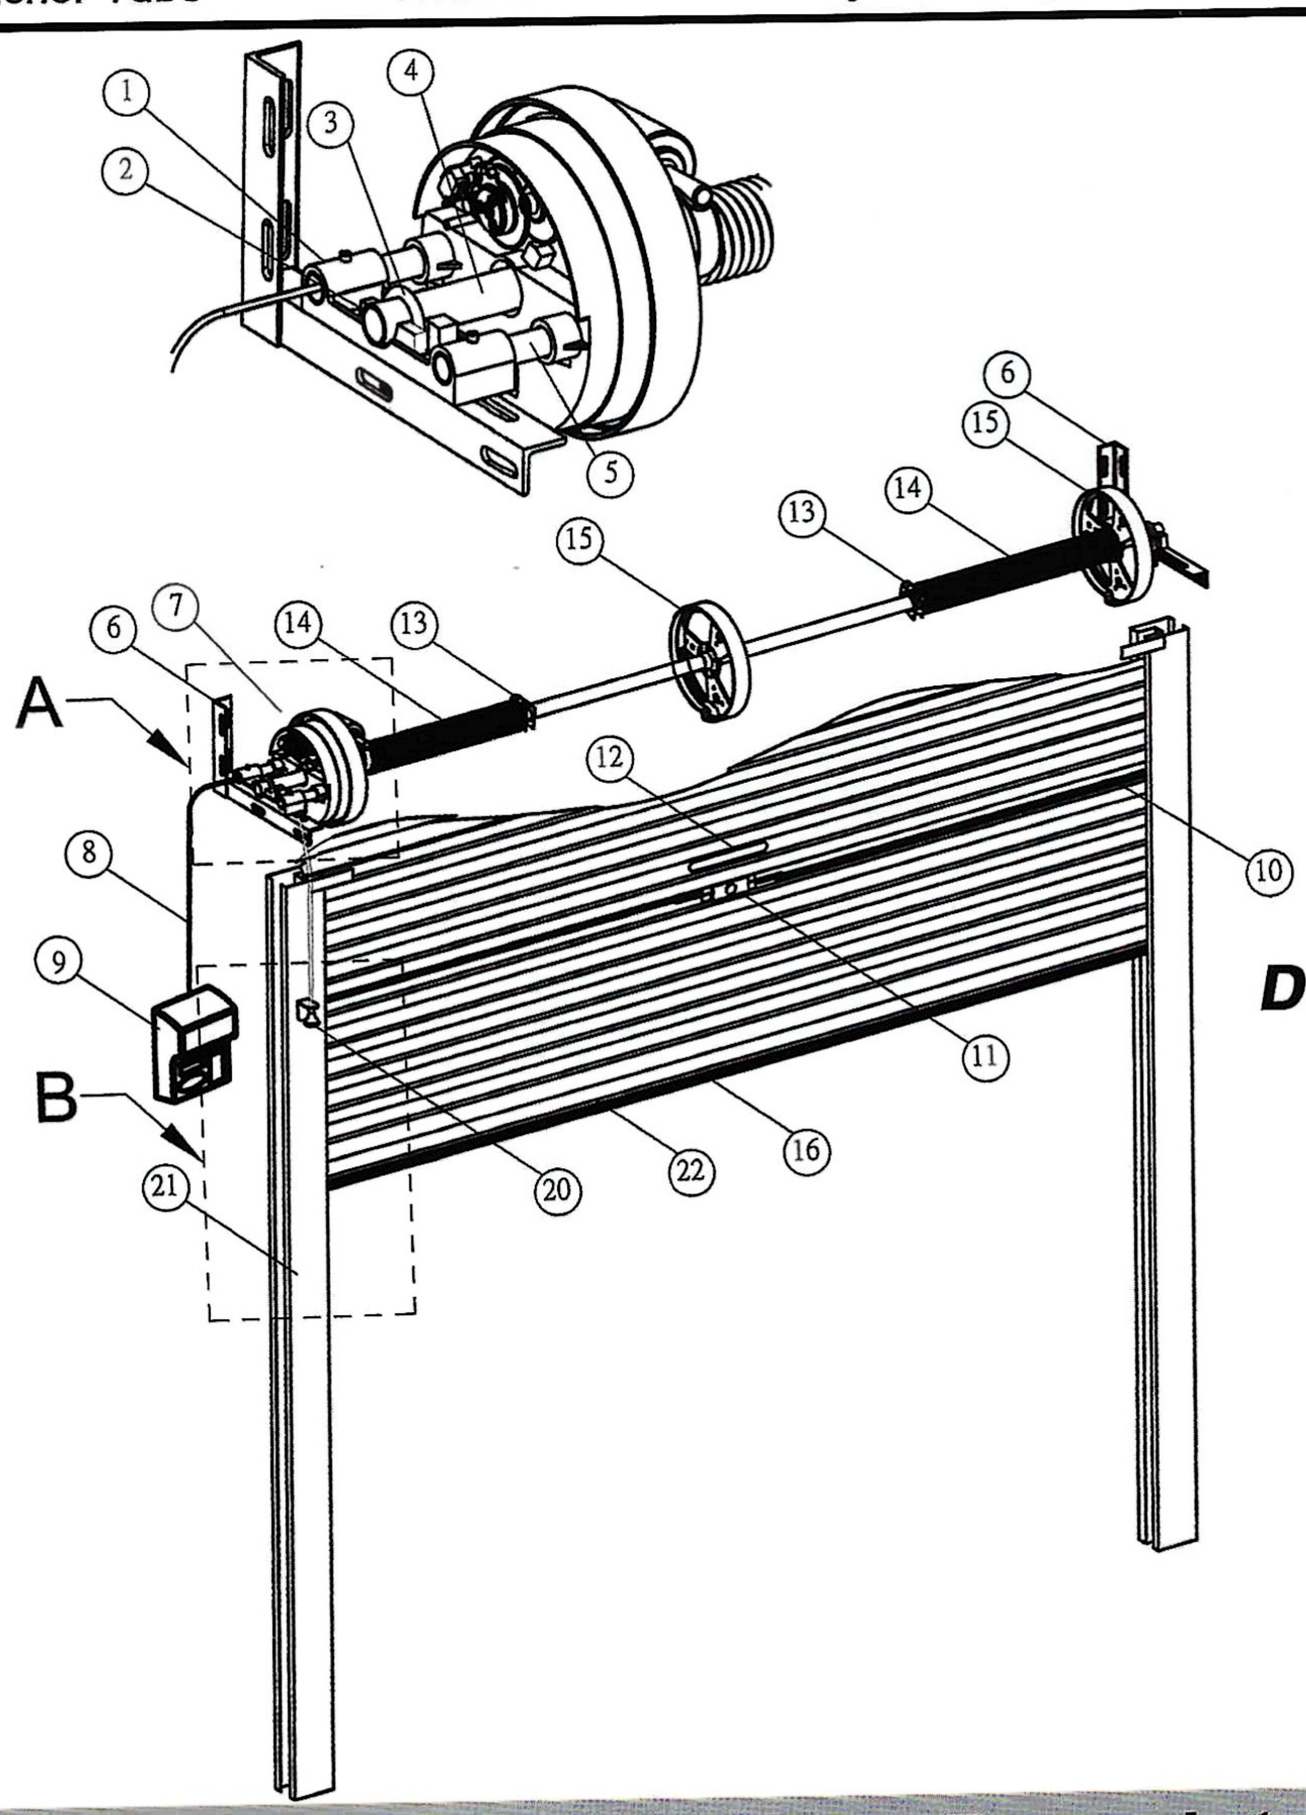

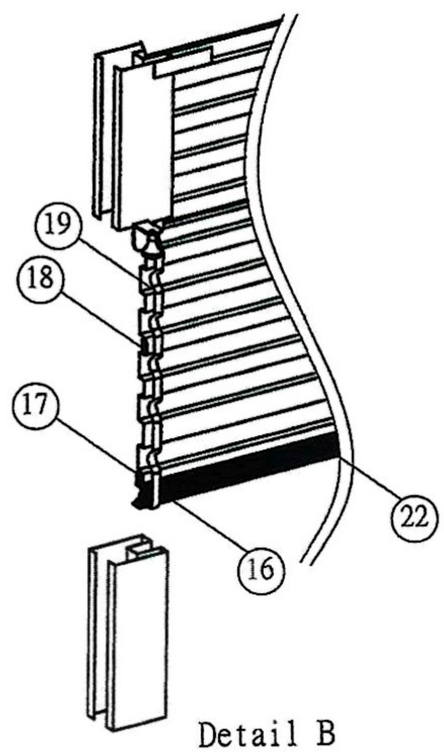


Door Case Size Reference Table

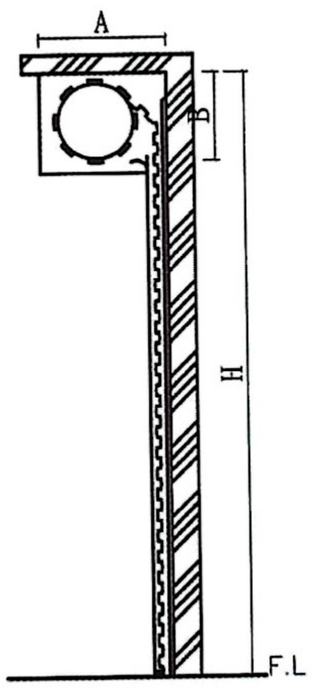

H	A	B
5000	660	600
4500	630	580
4000	600	560
3600	550	520
3200	500	480
2800	500	460
2400	500	420

Zineculum Prepainted Steel Coil

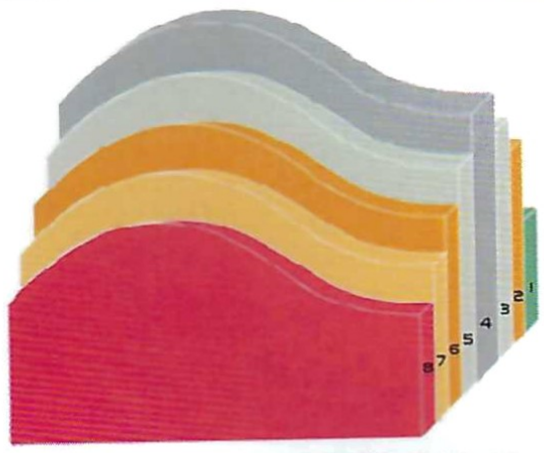

1. Service Coating
2. Chemical Pretreatment
3. 55% Al-Zn/Zn Coating
4. Cold Rolled Strip
5. 55% Al-Zn/Zn Coating
6. Chemical Pretreatment
7. Primer Coating
8. Finish Coating

Characteristics

1. Many colors are available to match the environment and attach value to the appearance.
2. Superior resistance against environment : Heat resistance, corrosion resistance, umidity resistance, weather proof, etc.
3. Formability, impact resistance, and acid/alkali resistance, superior workability and chemical resistance are the major reasons for the popularity of prepainted 55% Al-Zn alloy-coated.

SPEED ROLLER DOOR

* 雙操作模式 Dual Operation Type *

1.手動模式 Manual by Spring Type

2.電動模式 Motorized Type

* 設計限制 Design Limitations *


1.最大寬度 Max Width: 6000mm

2.最大高度 Max Height: 5000mm




Residential
23


Residential

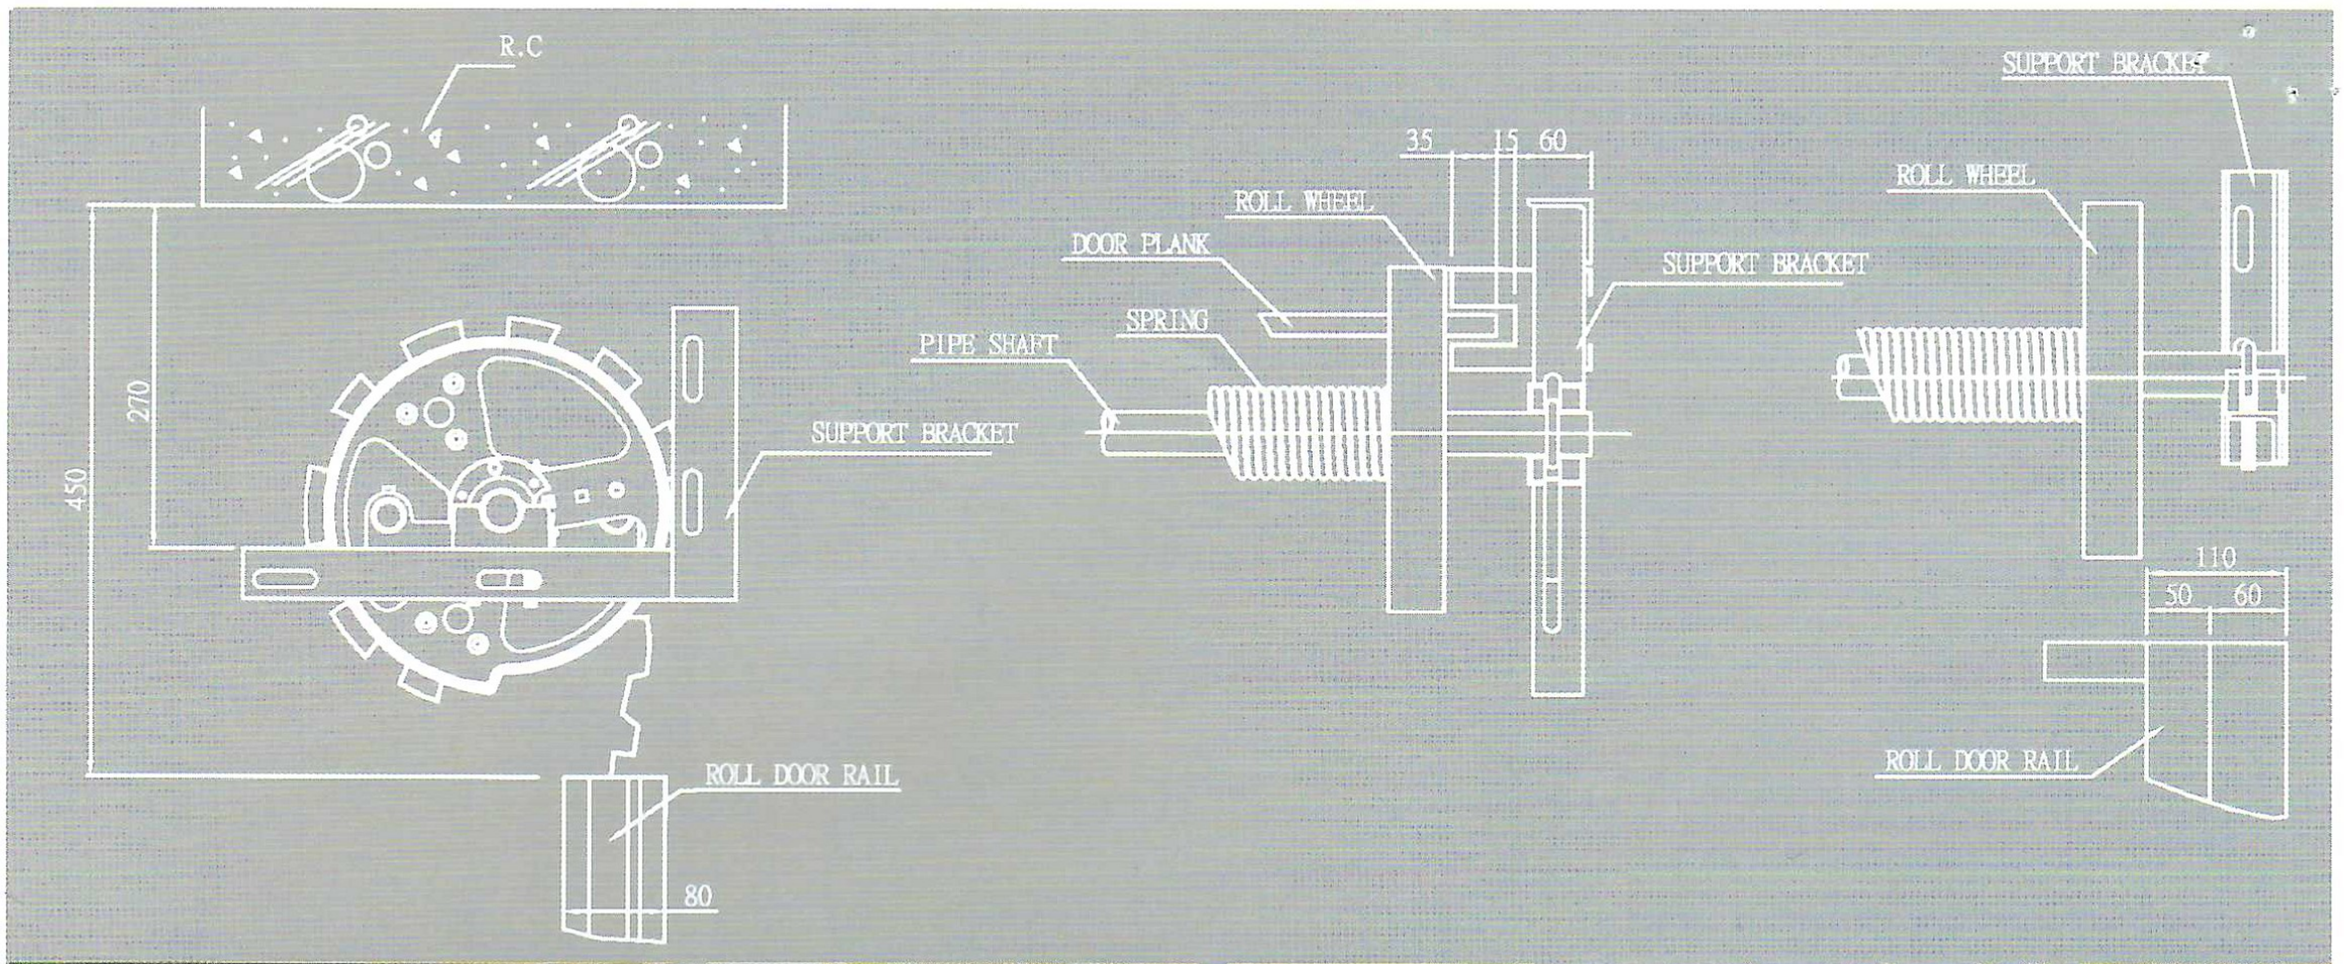



Tel: 088-432288 Fax: 088-428196
E-mail: lcpt@streamyx.com
Lot 45B, Jln. Kilang, Sedco Light Industrial Estate, Kolombong,
Off Miles 5 1/2, Jln Tuaran, Kota Kinabalu, Sabah.